

Punto Evo Flexo



- Mixed flow fan with low decibel rating
- Straightening vanes to improve airflow
- Wall installations only
- Butterfly backdraft shutter
- IP45 Rated

Technical Details

Code	Model	Watts	Amps	l/s	Pa	m ³ /hr
11313	Punto Evo Flexo MEX 100/4" LL	9	0.052	25	39.23	90
11314	Punto Evo Flexo MEX 100/4" LLT	9	0.052	25	39.23	90

Punto Evo

- Mixed flow fan with low decibel rating
- Straightening vanes to improve airflow
- Butterfly backdraft shutter
- IP45 Rated

Technical Details

Code	Model	Watts min-max	Amps min-max	l/s min-max	Pa min-max	m ³ /hr min-max
11260	Punto Evo ME 100/4" LL	5-9	0.039-0.052	18.1-26.4	24.52-46.09	65.16-95.04
11264	Punto Evo ME 100/4" T LL	5-9	0.039-0.052	18.1-26.4	24.52-46.09	65.16-95.04
11261	Punto Evo ME 100/4" TP LL	5-9	0.039-0.052	18.1-26.4	24.52-46.09	65.16-95.04
11262	Punto Evo ME 100/4" T LL HCS	5-9	0.039-0.052	18.1-26.4	24.52-46.09	65.16-95.04
11263	Punto Evo ME 100/4" LL PIR	5-9	0.039-0.052	18.1-26.4	24.52-46.09	65.16-95.04

Punto Evo Gold



- Mixed flow fan with low decibel rating
- Straightening vanes to improve airflow
- Butterfly backdraft shutter
- IP45 Rated

Technical Details


Code	Model	Watts min-max	Amps min-max	l/s min-max	Pa min-max	m ³ /hr min-max
11306	Punto Evo ME 100/4" Gold	5-9	0.039-0.052	18.1-26.4	24.52-46.09	65.16-95.04
11316	Punto Evo ME 100/4" T Gold	5-9	0.039-0.052	18.1-26.4	24.52-46.09	65.16-95.04
11307	Punto Evo ME 100/4" Rose Gold	5-9	0.039-0.052	18.1-26.4	24.52-46.09	65.16-95.04
11317	Punto Evo ME 100/4" T Rose Gold	5-9	0.039-0.052	18.1-26.4	24.52-46.09	65.16-95.04
11308	Punto Evo ME 100/4" Black Gold	5-9	0.039-0.052	18.1-26.4	24.52-46.09	65.16-95.04
11318	Punto Evo ME 100/4" T Black Gold	5-9	0.039-0.052	18.1-26.4	24.52-46.09	65.16-95.04
11309	Punto Evo ME 100/4" White Gold	5-9	0.039-0.052	18.1-26.4	24.52-46.09	65.16-95.04
11319	Punto Evo ME 100/4" T White Gold	5-9	0.039-0.052	18.1-26.4	24.52-46.09	65.16-95.04



Dimensions (mm)

Model	Evo	Evo Gold	Evo Flexo
A	173	173	173
B	173	173	73
C	126	126	126
D	98	98	98
E	61.5	61.5	61.5
F	50	50	50
G	132	132	132
H	132	132	132
L	3.5	3.5	3.5
Kg	0.6	0.6	0.6

Wall or ceiling mounted fans for intermittent ventilation of toilets (8 l/s), bathrooms (15 l/s), utility rooms (40 l/s) or kitchens (60 l/s).

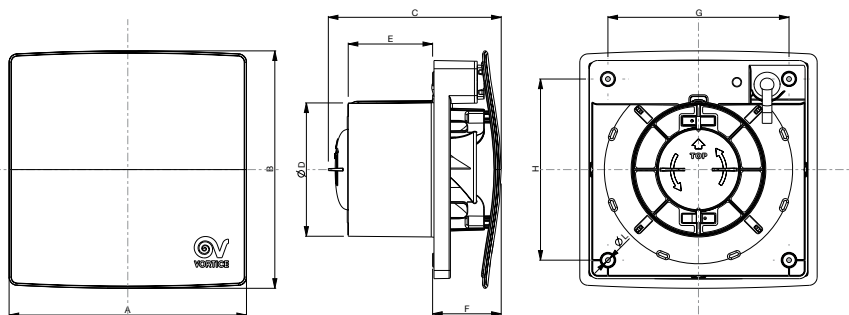

Product Code Terminology

P	Pullcord
T	Timer
A	Auto Shutter
LL	LongLife
PIR	Passive Infrared
HCS	Humidity Control System
I	Inbuilt (Recessed)
R	Reversible
M	Metal
E	ERP Compliant
Q	Quiet
D	Dual Speed
TP	Timer Programmable
ES	Energy Saving
V0	Self-Extinguishing Plastic
12V	12V Low Voltage Fan