

Quadro Evo

Centrifugal fans for residential use, available in versions for wall / ceiling mounting or recessed installation, compliant with DIN 18017-3 standard, which specifies particular requirements in terms of performance and fire resistance. Ultra low noise emission levels and high degree of water ingress protection (IP45). Fan Centers and Casings purchased separately.




Technical Details

Code	Model	Watts	Amps	Max Airflow m ³ /h	I/s	Max Pressure Pa mmH ₂ O	Pa	Max
11522	QE 100 LL	26	0.17	100	27.8	36	353	50
11527	QE 100 LL T	26	0.17	100	27.8	36	353	50
11533	QE 100 LL TP	26	0.17	100	27.8	36	353	50
11538	QE 100 LL TP HCS	26	0.17	100	27.8	36	353	50
11545	QE 100 LL T PIR	26	0.17	100	27.8	36	353	50
11524	QE 100/60 LL	26	0.17	100	27.8	36	353	50
11531	QE 100/60 LL T	26	0.17	100	27.8	36	353	50
11535	QE 100/60 LL TP	26	0.17	100	27.8	36	353	50
11542	QE 100/60 LL TP HCS	26	0.17	100	27.8	36	353	50
11547	QE 100/60 LL T PIR	26	0.17	100	27.8	36	353	50

Dimensions (mm)

	A	B	C	D	E	F	G	H
Surface Version	262	262	123	73	73	79	71.5	76
Recessed Version	262	262	114.5	80	73	79	71.5	90

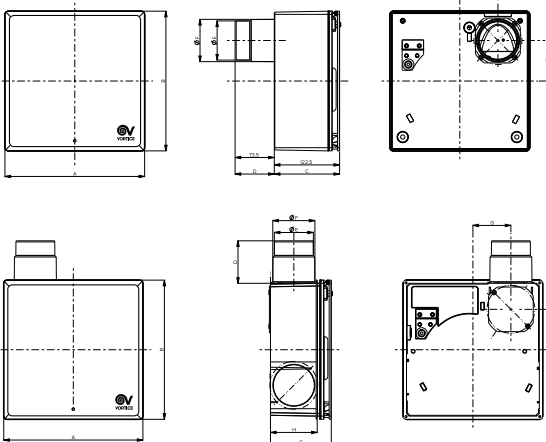



Cases

Code	Surface Version	Description
11561		Basic case for surface (wall/ceiling) installation, made of ABS plastic. Spigot made of ABS plastic with integrated backdraught shutter.
11563		Basic case for surface (wall/ceiling) installation, made of ABS plastic. Spigot made of Stainless Steel with integrated K90 backdraught shutter.
Code	Recessed Version	
11560		Basic case for recessed installation, made of ABS plastic with Spigot made of ABS with integrated backdraught shutter.
11562		Basic case for recessed installation, made of ABS plastic with Stainless steel spigot, integrating a K90 fireproof valve and backdraught shutter.
11564		Fireproof K90 casing for recessed installation and rear discharge. Stainless steel spigot, with integrated K90 fireproof valve and backdraught shutter.

Product Code Terminology

P	Pullcord
T	Timer
A	Auto Shutter
LL	LongLife
PIR	Passive Infrared
HCS	Humidity Control System
I	Inbuilt (Recessed)
R	Reversible
M	Metal
E	ERP Compliant
Q	Quiet
D	Dual Speed
TP	Timer Programable
ES	Energy Saving
V0	Self-Extinguishing Plastic
12V	12V Low Voltage Fan