

# CA V0 Plastic In-Line Fans

The CA Metal range of in-line centrifugal fans provide intermittent and continuous ventilation in ducted applications in commercial and industrial premises such as shops, cafes, restaurants, pubs, gyms, sports clubs, schools, offices and much more.







## Product Features

- 5 model sizes stocked – 102mm/4", 150mm/6", 200mm/8", 250mm/10", 300mm/12"
- Ball bearing motors for long life
- External rotor motor and thermal protection
- Dual speed for silent and boost operation
- Speed adjustable using optional controller



- Mounting bracket included
- Self-extinguishing V0 Plastic
- IPX4 splash proof protection on all models.
- IMQ data label ensures data and performance is third party certified.
- Conforms to international standards: CEI EN 61 – 28 standards.

## Pressure/Performance Curves

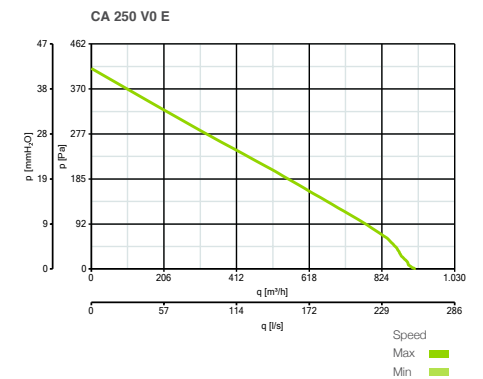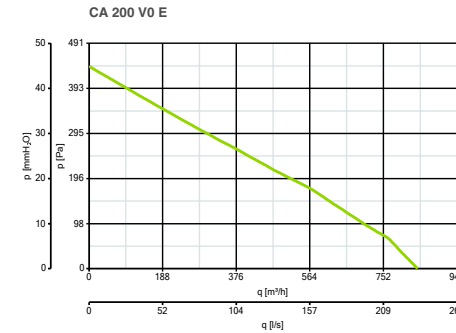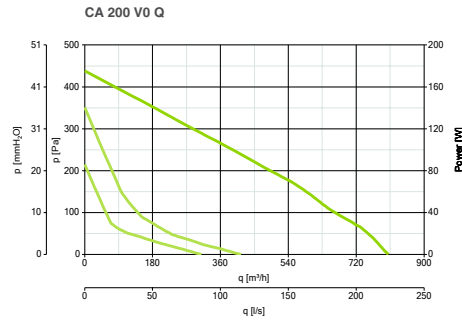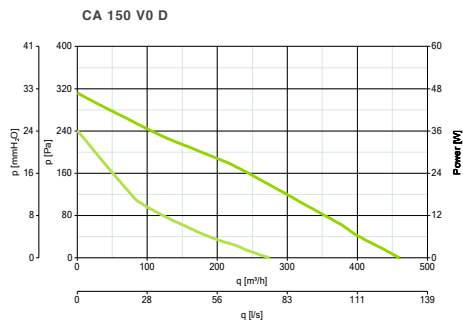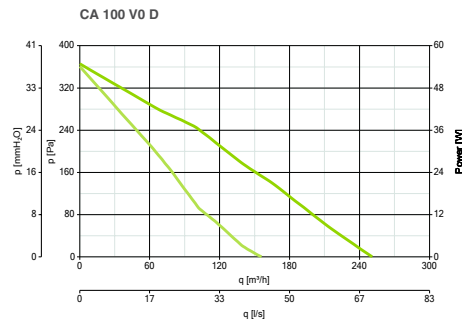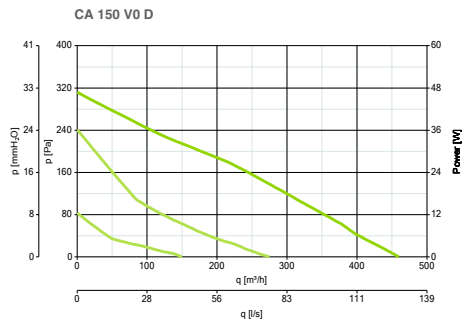

## CAV0 Range LONG LIFE 30.000h

Code	Commercial In Line Fans CA V0 Range Plastic	Box Qty
16008	4"CA100V0 In-Line Duct Fan 2-Speed (85 <sup>l</sup> /251 <sup>m³</sup> /h) (24/69.7 L/s)	4
16028	6"CA150V0 In-Line Duct Fan 2-Speed (150 <sup>l</sup> /450 <sup>m³</sup> /h) (41/128 L/s)	1
16035	8"CA200 V0 Q In-Line Duct Fan (805 M <sup>3</sup> /h) (224 L/s)	1
16038	8" CA200 V0 In-Line Duct Fan (775M <sup>3</sup> /h) (215.3 L/s)	1
16039	10"CA250 V0 In-Line Duct Fan (855 M <sup>3</sup> /h) (237.5 L/s)	1
16041	12"CA315 V0 In-Line Duct Fan (1100 M <sup>3</sup> /h) (305 L/s)	1




Fan with mounting brackets.

## Dimensions (mm)

MODEL	A	B	C	D	E	F	KG
CA 100 V0 D	250	250	250	97	30	30	2.4
CA 125 V0 D	250	250	250	122	30	30	2.3
CA 150 V0 D	300	305	300	147/157	30	30	2.6
CA 200 V0 Q	340	280	340	197	30	30	3.1
CA 200 V0 E	340	280	340	197	40	30	4.3
CA 250 V0 E	340	305	340	247	60	30	4.3
CA 315 V0 E	400	340	400	312	75	40	6.5



At Duct end.

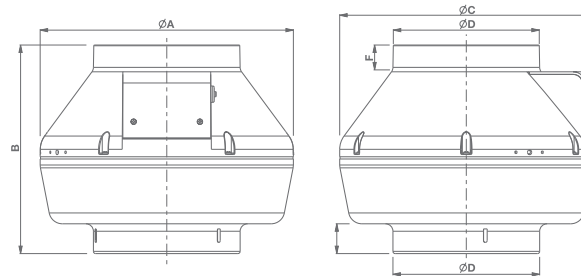

In-line Duct.