

Vario Standard Window / Wall Fans





The Vario standard range of window / wall fans provide intermittent ventilation for shops, cafes, restaurants, pubs, gyms, sports clubs, schools, offices and much more. This is a versatile and popular range of fans for through the wall / window applications. The standard range is fitted with bush bearing motors for regular intermittent operations.


Product Features

- 2 standard installation options – window / wall or built in
- 3 model sizes – 150mm/6", 230mm /9", 300mm/12"
- 5 window / wall options
- Automatic or manual (pull cord)
- All models have Automatic Shutters
- Kits for special applications available
- Bush bearing motors
- 10 controller options – 4 speed controllers – 1 infra red remote controller – 5 environmental controllers.
- IPX4 splash proof protection on all models.
- IMQ data label ensures data and performance is third party certified.
- Conforms to international standards: CEI EN 60335-2-80, CEI EN 60529 (code IP) and CEI 107-53/1986.

Pressure/Performance Curves

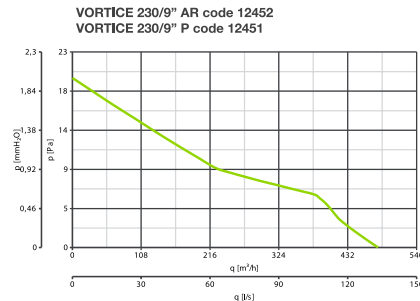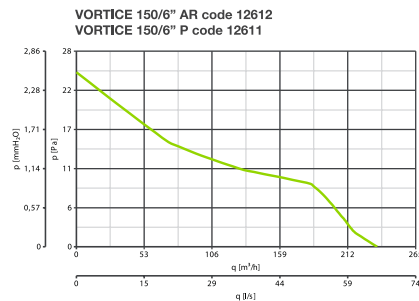

Speed
Max
Min

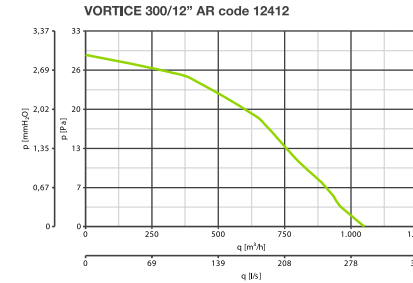

The **Vario Standard Range** is manufactured with shielded pole motors and has bronze bearings for long life. These fans are Designed for intermittent operation. IPX4.

Note: Long Life versions of the Vario range are available for continuous operation applications. For details contact Sales@ATC.ie

Window / Wall Fans Standard

Code	Vario Standard Range Window / Wall / Roof	Box Qty
12611	6" Window/Wall Fan With Pullcord (235m³/h) (65.3 L/S)	4
12612	6" Window/Wall Fan Auto (235 ⁽¹⁾ /150 ⁽²⁾ m³/h) (65.3/41.7 L/S)	4
12451	9" Window/Wall Fan With Pullcord (480 m³/h) (133 L/S)	1
12452	9" Window/Wall/Roof Fan Rev Auto (480 ⁽¹⁾ /310 ⁽²⁾ m³/h) (133/86 L/S)	1
12412	12" Window/Wall Fan Rev Auto (1050 ⁽¹⁾ /700 ⁽²⁾ m³/h) (292/194.4)	1

⁽¹⁾ Extract ⁽²⁾ Intake

Extension Rods

Code	Vario Standard Range Window / Wall / Roof	Box Qty
13018	Extension Rods For Vario Range	1

Built-in Wall Fans Standard

Code	Vario Standard Range Built-In Wall	Box Qty
12613	6" Wall/Roof Fan Auto (220 ⁽¹⁾ /130 ⁽²⁾ m³/h) (61.1/36.1 L/S)	1
12453	9" Wall/Roof Fan Rev Auto (450 ⁽¹⁾ /300 ⁽²⁾ m³/h) (125/83.3 l/s)	1
12413	12" Wall/Roof Fan Rev Auto (1200 ⁽¹⁾ /850 ⁽²⁾ m³/h) (333.3/236.1 l/s)	1

⁽¹⁾ Extract ⁽²⁾ Intake



13018: For installation on walls between 38mm to 300mm.


Dimensions (mm)

Window and Wall Standard and Long Life Fans

MODEL	A	B	C	D	E Min/Max	Window/Wall	KG
150/6"	215	218	31	97.5	2/38	185-190	2.07
230/9"	294	297	31	130	2/38	257-262	3.45
300/12"	390	393	31	147	2/38	324-329	6.13

Built in Standard and Long Life Fans

MODEL	A	B	C	D	Wall (Min)	KG
150/6"	300	9.5	10.5	135	260-265	2.52
230/9"	400	10	11	180	335-340	3.45
300/12"	495	10.5	11.5	210	435-440	7.2



Vario Range Accessories

Cowl Kit

Code	Cowl Kit	Box Qty
13001	6" Roof / Window Cowl Kit	1
13002*	9" Roof / Window Cowl Kit	1
13003*	12" Roof / Window Cowl Kit	1

Ceiling Kit

Code	Ceiling Kit	Box Qty
13012*	6" & 9" Flush Ceiling Kit	1
13014*	12" Flush Ceiling Kit	1

Flush Wall Kit

Code	Flush Wall Kit	Box Qty
13015*	6" Flush Wall Kit	1
13016*	9" Flush Wall Kit	1
13017*	12" Flush Wall Kit	1

Plate Kit

Code	Plate Kit	Box Qty
13027*	6" Spigot Plate Kit	1
13028*	9" Spigot Plate Kit	1
13029*	12" Spigot Plate Kit	1

* Non Stock Products Special Order Required



13016 + 13012 + 8502.



13002 + 13028 + 13012
Built-in Roof mounted for
remote applications.

